

> Download the vColorTuner Software

1. Visit ViewSonic's website to download the vColorTuner software:
<https://www.viewsonic.com/>
2. After the download completes, install the software.




> Setup

1. Connect one end of a USB Type A cable to the projector's service port, and the other end to your laptop.
2. Open the projector's OSD Menu and go to : **SYSTEM > Control Method > USB.**




> Create a vColorTuner account

1. Open the vColorTuner software.
2. Sign up for a vColorTuner account.

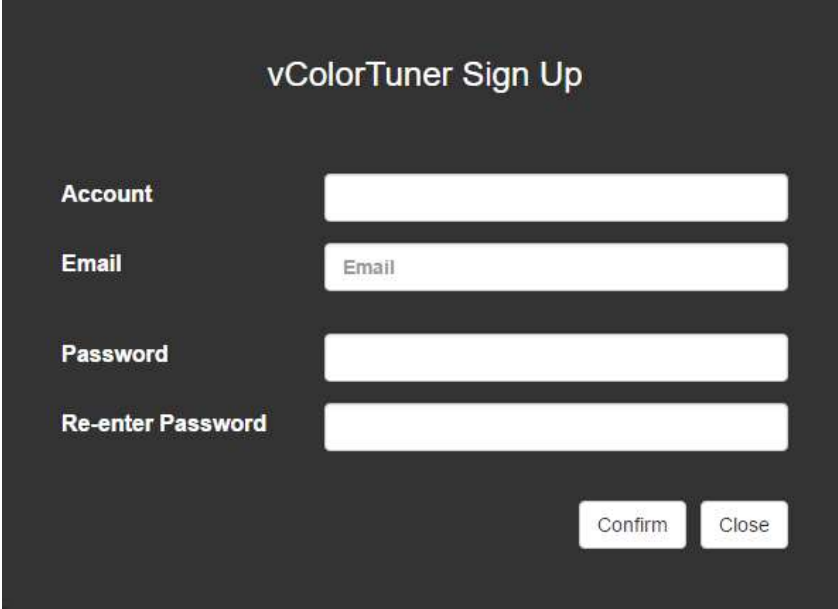


The image shows a dark-themed sign-up form titled "vColorTuner Sign Up". It contains four input fields: "Account", "Email", "Password", and "Re-enter Password". The "Email" field has the placeholder text "Email". At the bottom right, there are two buttons: "Confirm" and "Close".

3. Activate your account via the email link.

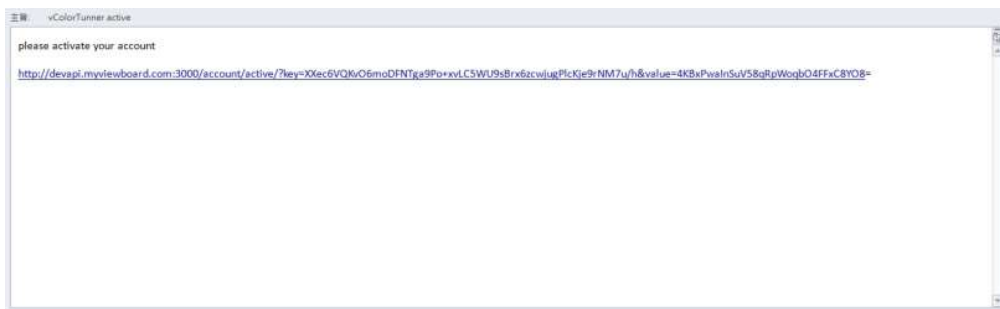


> vColorTuner Quick Tour


1. Once logged in, there will be a Quick Tour to introduce the software.

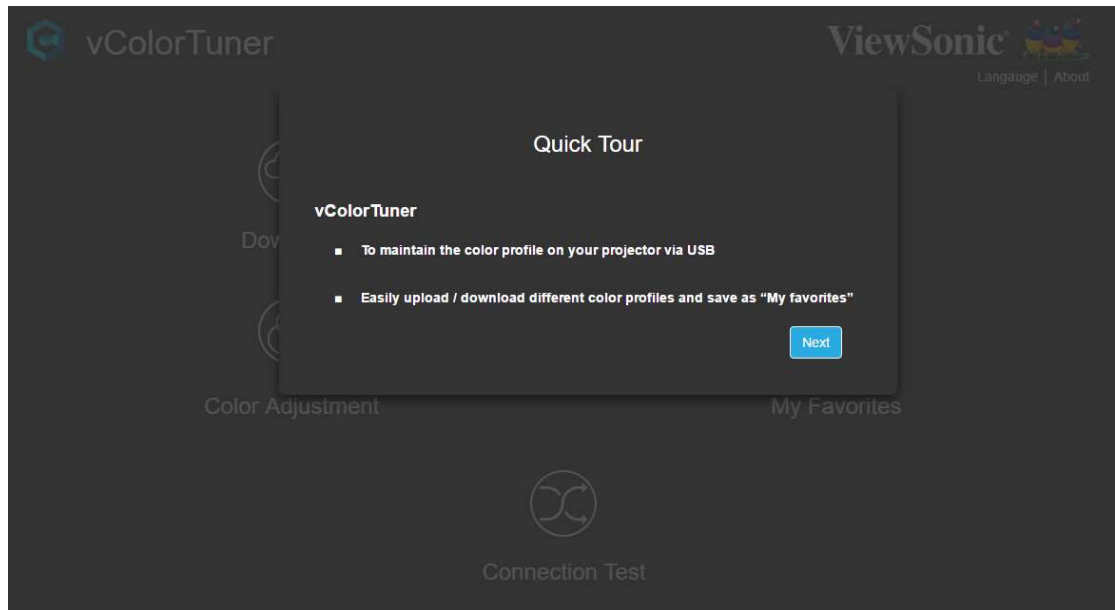

2. To check the status of the connection with the vColorTuner Server, press the **Testing** button.

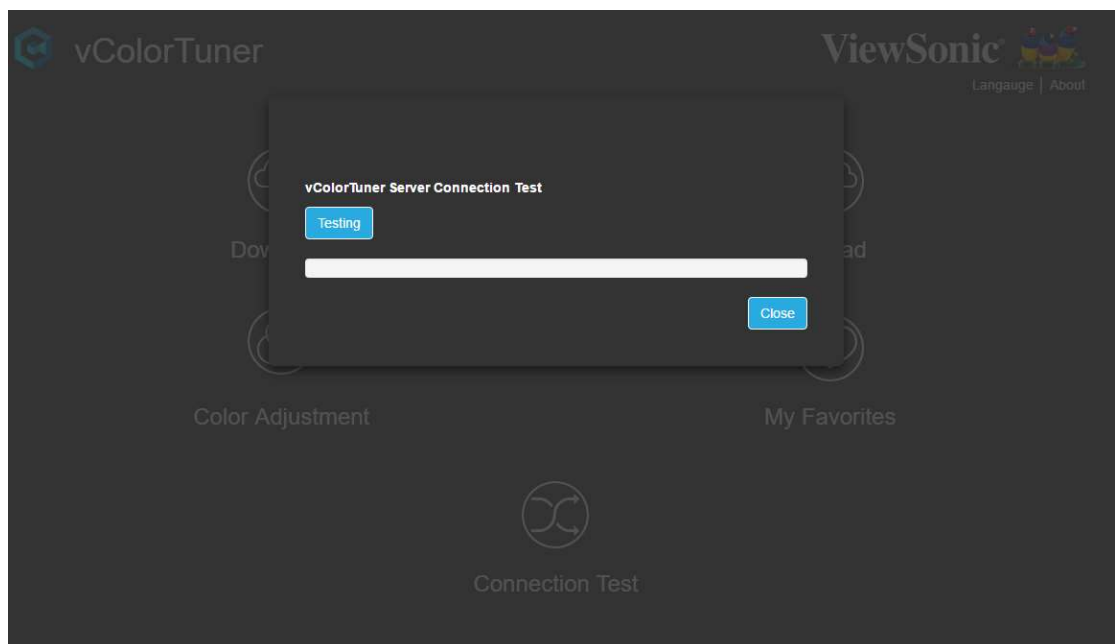

3. Follow the on-screen instructions to complete the process.

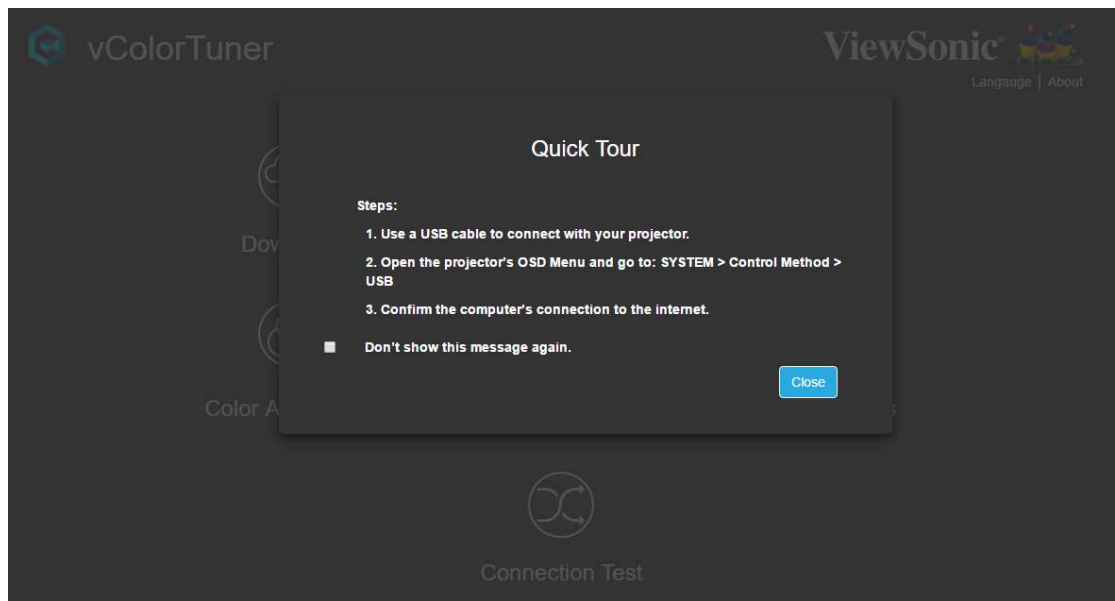


> Language


The vColorTuner software supports a multi-language OSD.

To adjust the language:


1. Select **Language**.

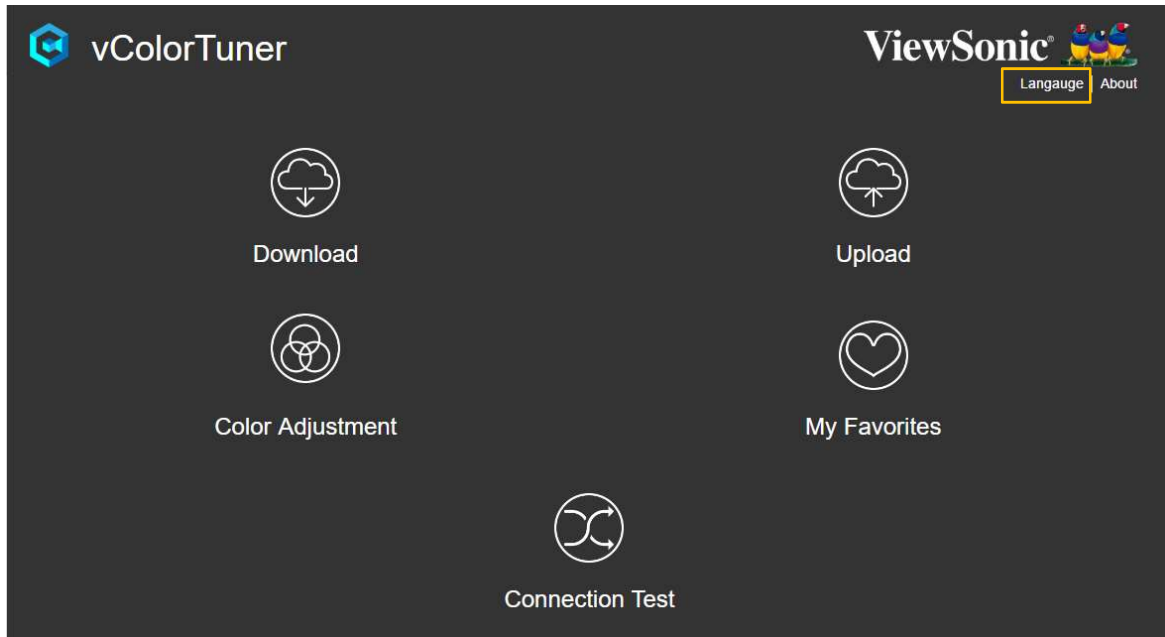

2. Choose your preferred on-screen language from the list provided, and click **OK**.

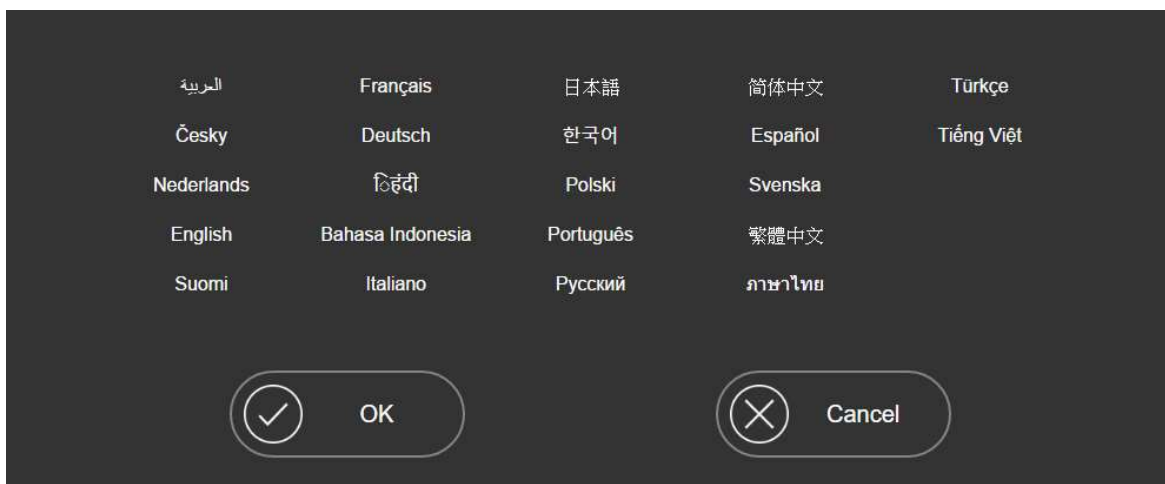

> vColorTuner Homepage

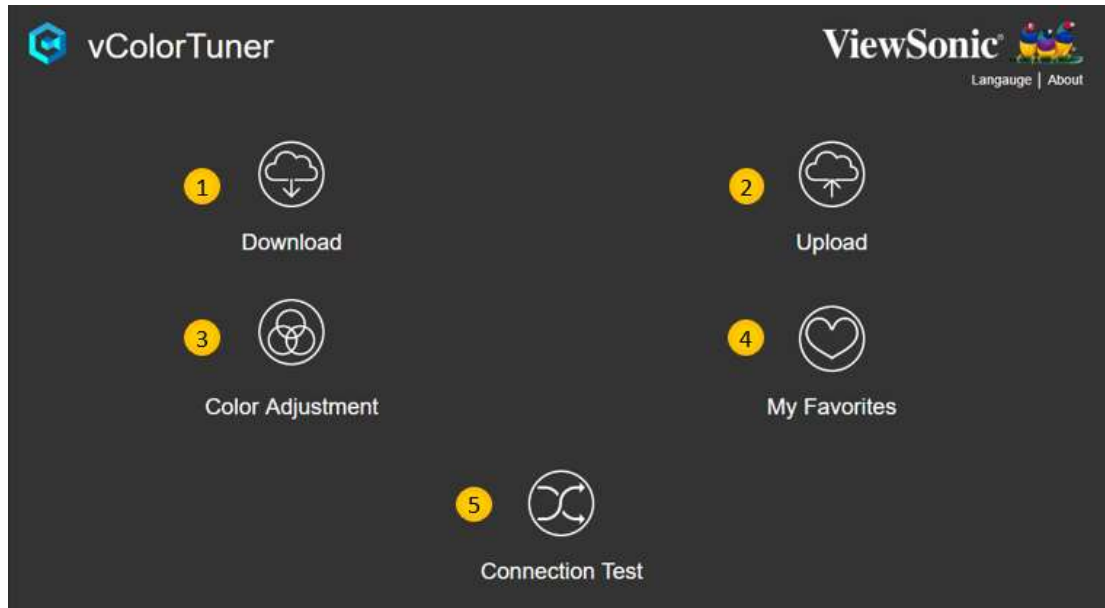

Menu	Description
[1] Download	Check, download, and exchange color profiles on the server.
[2] Upload	Upload color profiles from My Favorites .
[3] Color Adjustment	Adjust color values to your preference.
[4] My Favorites	Save your color profile(s) or check downloaded files.
[5] Connection Test	Check connection status with the server.

NOTE: If the connection fails, an “Error Message” will appear and remind you to check the connection.

Download

The screenshot shows the vColorTuner application interface. At the top, there are navigation tabs for 'Download', 'Upload', 'Color Adjustment', and 'My Favorites'. The main area displays a table of profiles with columns for 'No.', 'User ID', 'Model', 'Profile Name', 'Color Mode', 'Times', 'Description', and 'Action'. The first row is highlighted, and the 'Times' column for the first row is circled in yellow with a '3' next to it. The 'Action' column for the first row has 'Apply' and 'Download' buttons, with '1' and '2' respectively circled in yellow. The 'Download' button is highlighted in yellow.

No.	User ID	Model	Profile Name	Color Mode	Times	Description	Action
1	Charles_Wu	PX701HD	Engineering test	Sports	6	Test upload function	Apply Download
2	licialiu	PX701HD	LICIA 0116	Gaming	5	1st	Apply Download
3	angle1234	PX701HD	midgaming	Gaming	2	testgfdgfdgfdgfgfg	Apply Download
4	angle1234	PX701HD	high_sport	Gaming	2	test	Apply Download
5	kio	PX701HD	20190308_2	Sports	1	test~	Apply Download
6	kio	PX701HD	20190308_2	Sports	0	test~	Apply Download

Number	Description
1	Click the Apply button to preview your chosen profile.
2	Click the Download button to save profiles to My Favorites .
3	You may refer to Times to see which file is the most downloaded.

Upload

Key in **Profile Name** and **Description**, then choose the file you want to upload to the cloud. After completion, you can start to share your file(s) with others.



The image shows a dark-themed user profile upload form. The form contains several input fields and a file selection button. The following table summarizes the visible elements:

Field Label	Value / Content	Highlighted
User ID	lcialiu	No
Color Mode	Sports	No
Profile Name		Yes
Model	PX701HD	No
Description		Yes
*Use File To Upload		No
Choose File		Yes
Upload		No


Color Adjustment



Number	Description
1	Select the Color Mode .
2	Select the Gamma Table .
3	Drag the bar on each item to adjust its value. Changes will appear on projected images instantaneously.
4	Click the Reset button to restore the default settings for the bar.
5	After finishing adjustments, select the Save as Favorite button to save the profile.
6	Select the Reset Setting button to reset all changes and restore the default settings.

My Favorites

Here you can find files saved or downloaded from **Color Adjustment** or **Download**. To apply the selected profile to the projector, click the **Apply** button.

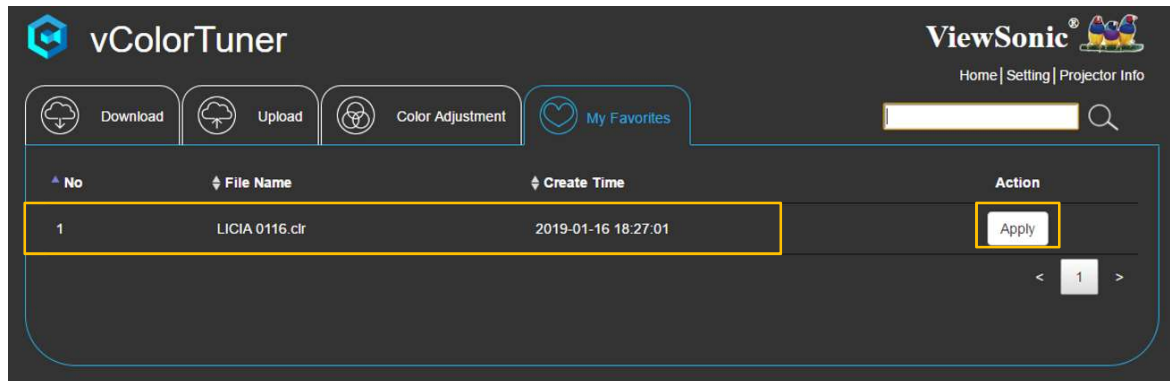


The screenshot shows the vColorTuner web interface. At the top left is the vColorTuner logo. At the top right is the ViewSonic logo and navigation links for Home, Setting, and Projector Info. Below the logo is a navigation bar with buttons for Download, Upload, Color Adjustment, and My Favorites. A search bar is located to the right of the navigation bar. The main content area displays a table with the following data:

No	File Name	Create Time	Action
1	LICIA 0116.clr	2019-01-16 18:27:01	Apply

At the bottom right of the table, there is a pagination control showing '< 1 >'.

> Settings

To change the password, select **Setting**.

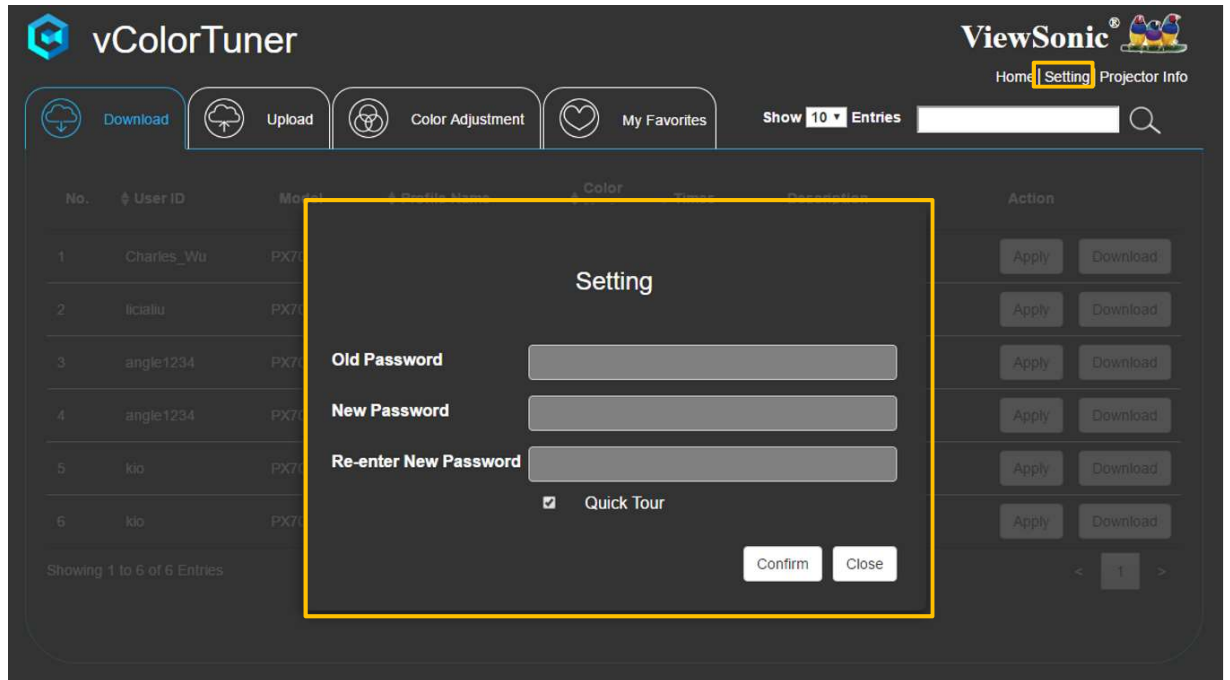

> Projector Info

Selecting **Projector Info** provides the device information, including: Model Name, Serial Number, and Firmware Version.

